

HIGH TEMPERATURE SUBMERSIBLE HT MOTORS



Dynapumps Offices Australia & Chile

Dynapumps
MORE THAN JUST PUMPS

HIGH TEMPERATURE
SUBMERSIBLE MOTORS

50/60Hz

CATALOGUE



General Features

- ▶ High quality PE2+PA winding wires
- ▶ High efficiency provides operation cost savings
- ▶ Water coolant system
- ▶ Flange with NEMA standards
- ▶ Stainless steel shaft
- ▶ Optional high corrosion resistive materials (AISI 304 - AISI 316 - Duplex - Bronze)
- ▶ Maximum ambient water temperature 50°C (70°C is optional)
- ▶ Standard voltage 380/460V - 50/60Hz (Allowable voltage tolerance $\pm 10\%$.)
- ▶ Variable operation revolutions by frequency convertor (over 30Hz)
- ▶ Availability to be operated by Soft-Starter
- ▶ CW & CCW direction of rotation.
- ▶ Rewindable Dynapumps Motors provides long service life.
- ▶ Our motors can be operated horizontally in pools and wells which are not deep enough





Heavy duty bearings with high thrust capacity

Heavy duty bearings provides the option to revolve both sides, has the capacity to carry high thrust load.



Water lubricated radial carbon bearings

Radial carbon bearings, which have channels in its structure that makes it possible to get lubricated by water easily, provides precise bearing of rotor shaft at up and down.



Chrome-plated bearing collet

Chrome-plated and precisely machined bearing collets which are located in the radial bearings operating area, have great importance for bearing the rotor.



Mechanical sealing system for high sand resistance and degree of protection: IP68

Although mechanical seal is optionally used by other companies, it is always used by Dynapumps as a standard, to prevent sand and other particles to get into motors to provide long bearing life.



Practical and easy-to-mount output power cable

Connection of the power cable to body is made practically by cable seal and seal cover. Power cables can be changed easily without any damage.



Pressure balancing checkvalve

Pressure balancing checkvalve controls the pressure changes inside the motor. When the pressure increases, it throw water out of the motor. When the pressure drops, it filtrates the water inside well and gets it inside the motor by the help of this checkvalve to balance the pressure inside. Thus why pressure differences inside motor never causes membrane under motor to blow up.

PT100 Overheating protection

By connecting the PT100 thermal sensors to the slot that is standardly placed on upper bearing body, motor temperature can be easily measured.



Up-Thrust ring

Provides safe operation conditions for motor by absorbing Up-Thrust loads with it's machined surface and water channels on it.



Cable connection

Preventing the water inside the motor to run through the cable and reach connection parts of power cables by specially designed cable seals.



Adjustment screw

Standard shaft height can be precisely adjusted by the adjustment screw on the thrust bearing base.



Membrane


Membrane minimizes the expansion pressure that is caused by heating of cooling water's inside the motor.



Slinger (sand guard)

Slinger helps to prevent the sand inside the water of the well entering in mechanical seal and through mechanical seal to inside of the motor.



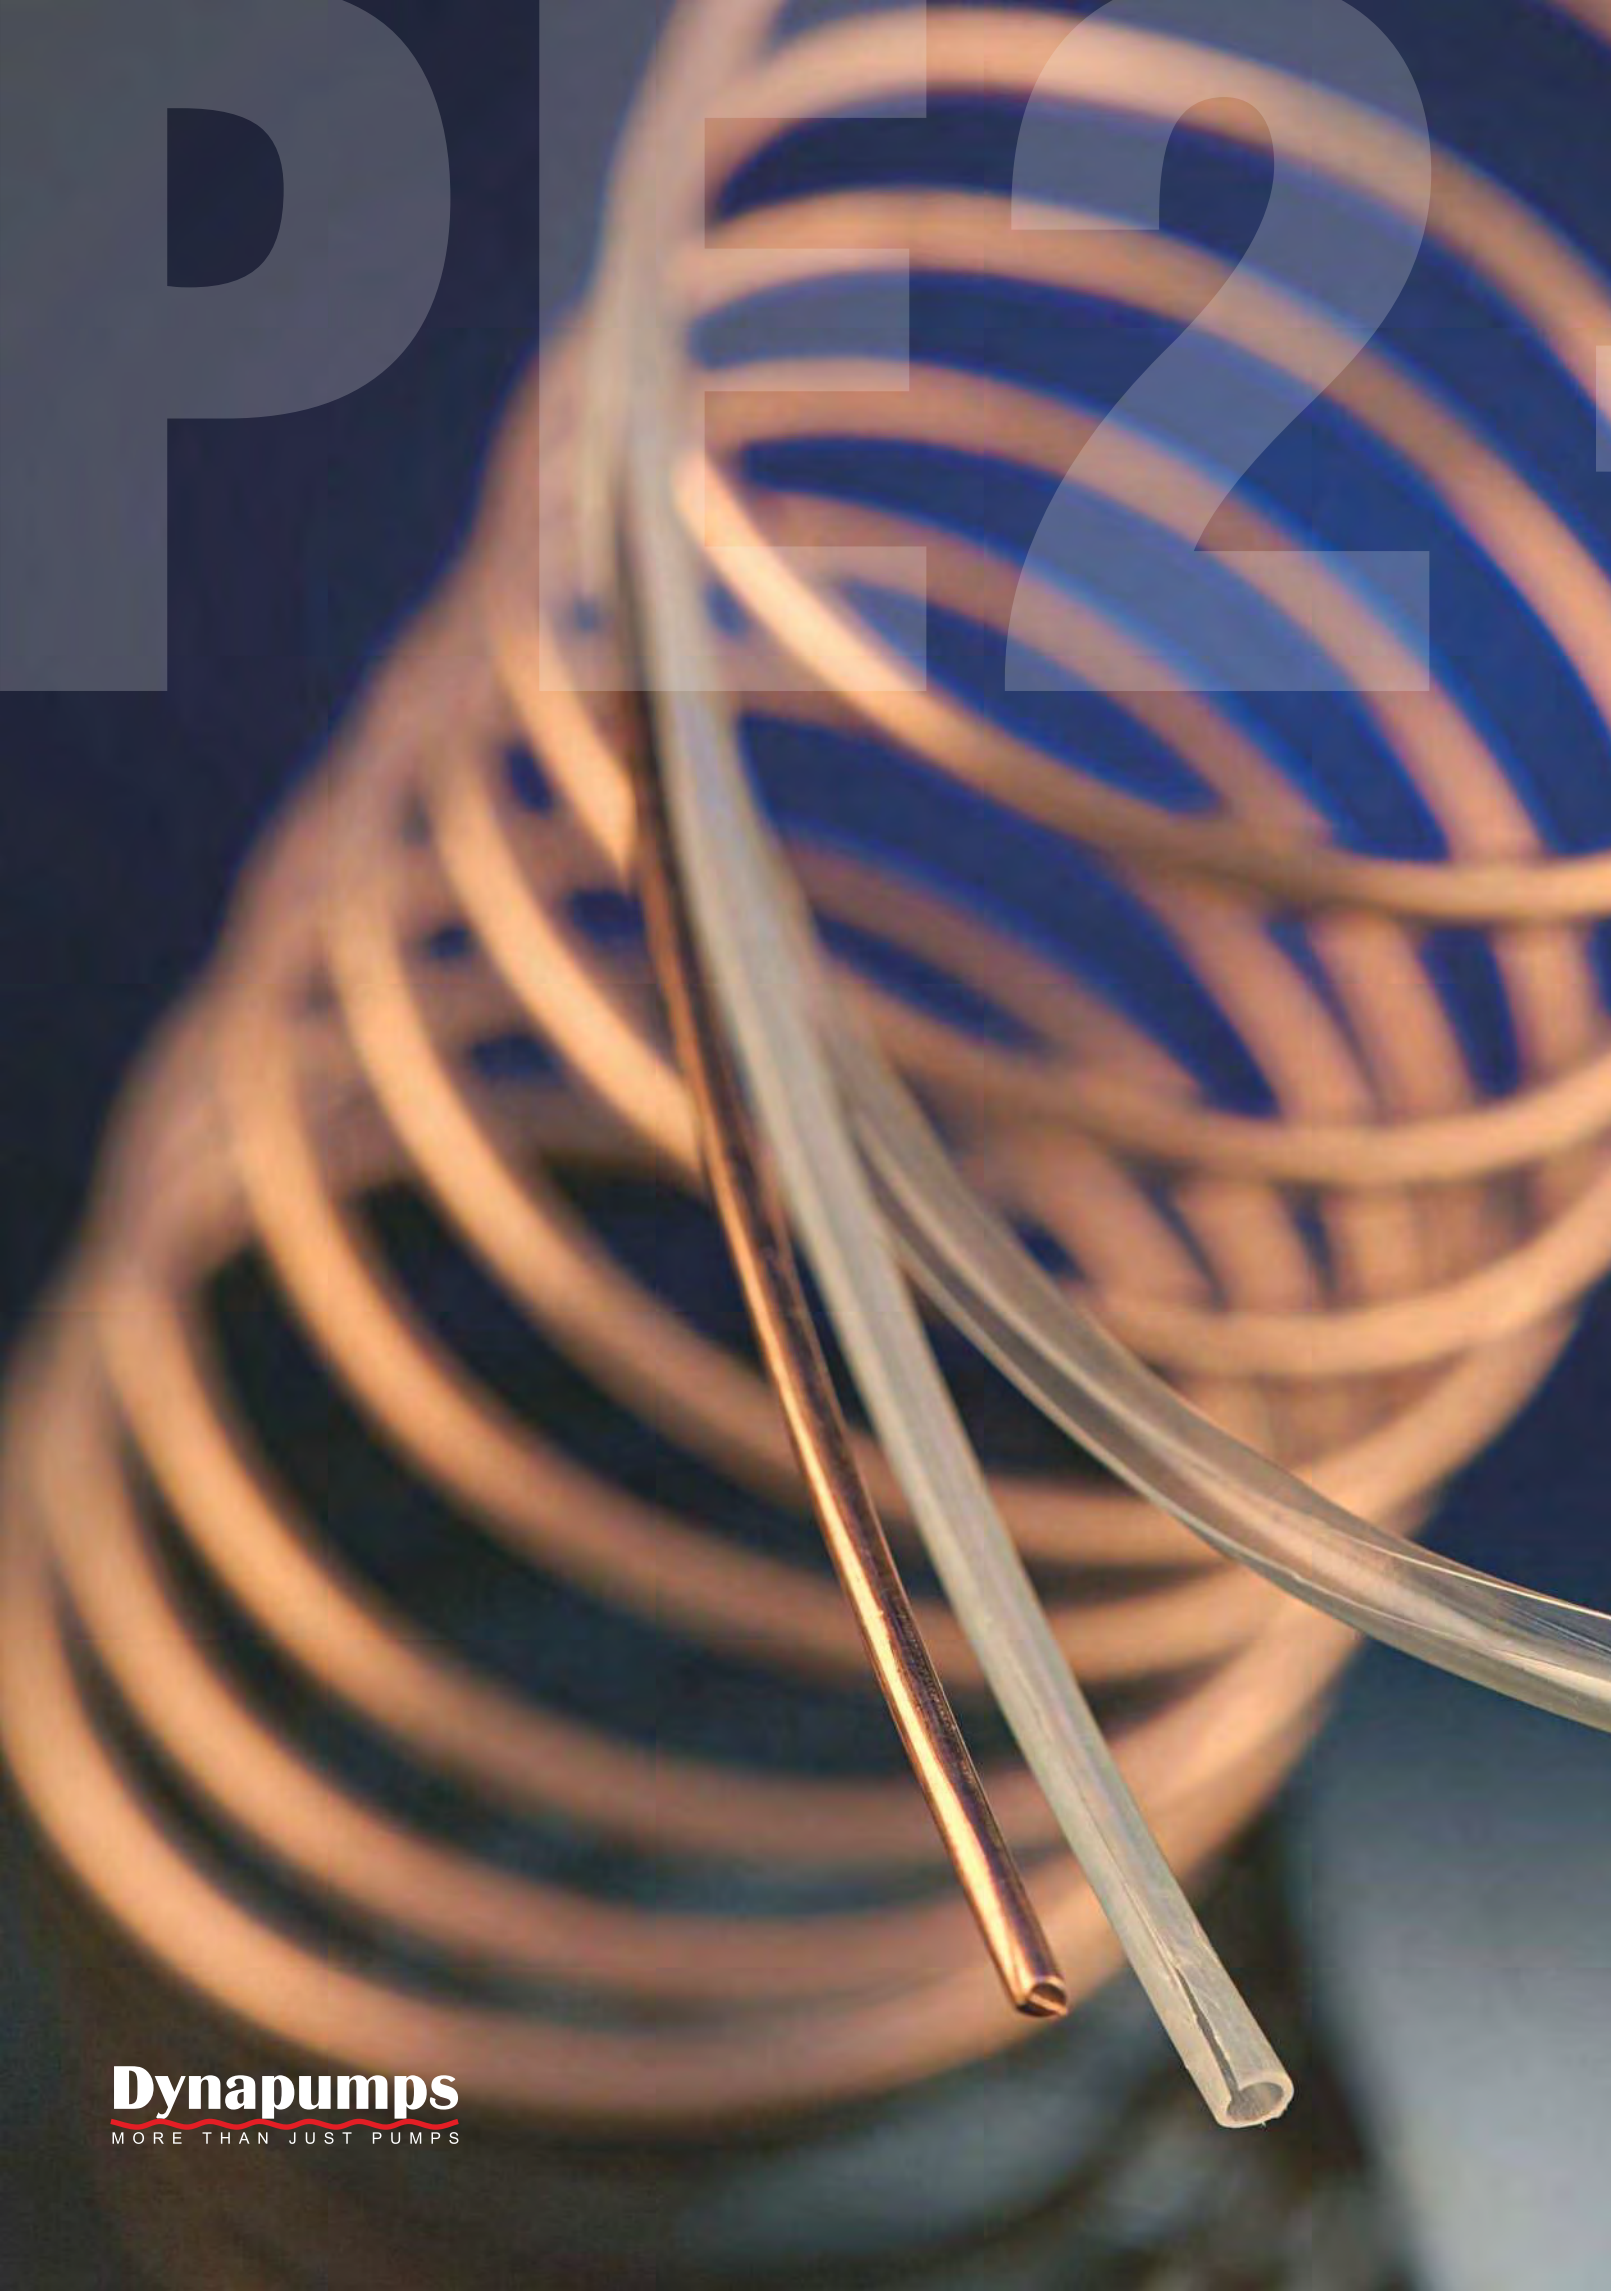

PH2

Dynapumps
MORE THAN JUST PUMPS

A standard of HT Motors:

“PE2+PA Winding Wire”

- ✓ Perfect performance up to 50°C ambient temp.,
- ✓ Longer Life
- ✓ High resistance against voltage fluctuation,
- ✓ Gives more safety factor than standard motors

Dynapumps submersible motors get their power from the PE2+PA winding wire used as standard. This wire, consisting of a single copper conductor, has a very high insulation resistance. PE2 (Polyethylene) provides electrical isolation, PA (Polyamide) provides mechanical protection. Increased heat resistance is achieved by cross-linking of polyethylene. In this way, Dynapumps submersible motors offers superior performance at high voltage and temperatures up to 50°C. At the same time it ensures trouble-free operation and a long service life of the motors for many years.

Technical Data

Tensile Strength	Standard: IEC 60811-1-1	23°C (±5)	≥ 10 N/mm ²
Elongation	Standard: IEC 60811-1-1	23°C (±5)	≥ 100 %
Dielectric constant	Standard: DIN 53483	20°C / 800 Hz	2,3
Specific insulation resistance	Standard: IEC 60093	20°C	10 Ω cm
Dielectric breakdown strength	Standard: DIN VDE 0303-21	20°C/50 Hz	70 kV/mm
Tensile strength after aging		80°C / 7x24 saat	≥ 10 N/mm ²
Elongation at break after aging		80°C / 7x24 saat	≥ 100 %

Product Code System

FSM 10 / 250

Motor power (HP)


Motor diameter

Motor type

Part List


No	Part Name	Material
1	Stator	-
1.1	Winding wire	PE2 / PA
1.2	Stator package	M350 / <i>Magnetic Seal</i>
1.3	Stator shell	AISI 304
2	Rotor	-
2.1	Shaft sleeve	St 37 (Coated CrNi)
2.2	Balance ring	St 37
2.3	Copper ring	Cu
3	Radial bearing	Carbon
4	Upper bearing body	GG20-22
5	Bushing	Bronze
6	Slinger (sand guard)	NBR_EPDM
7	Hexagon socket cap screws	Inox
8	Copper ring	Cu
9	Cover seal	AISI 420
10	Mechanical seal	Seramic Carbon
11	Axial thrust bearing key	AISI 420
12	Axial thrust bearing	Carbon With Antimony
13	Retaining ring	St 37
14	Tie rod	Inox
15	Lower bearing body	GG20-22
16	Thrust bearing support	GG20-22
17	Ball holder	St 37 (Coated Cr+3)
18	Thrust bearing ball	Inox
19	Tilting pads	AISI 420
20	O-ring	NBR 70
21	Thrust bearing body	GG20
22	Copper ring	Cu
23	Nut	Inox
24	Screw (thrust bearing base)	Inox
25	Membrane	NBR-EPDM
26	Membrane body	GG22
27	Hexagon socket cap screws	Inox
28	Check-valve	Bronze
29	O-ring	NBR 70
30	Cable seal	NBR
31	Seal cover	AISI 304
32	Nut	Inox
33	Plush (r 3/8")	Bronze
34	Ball holder pins	Inox

Technical Drawing

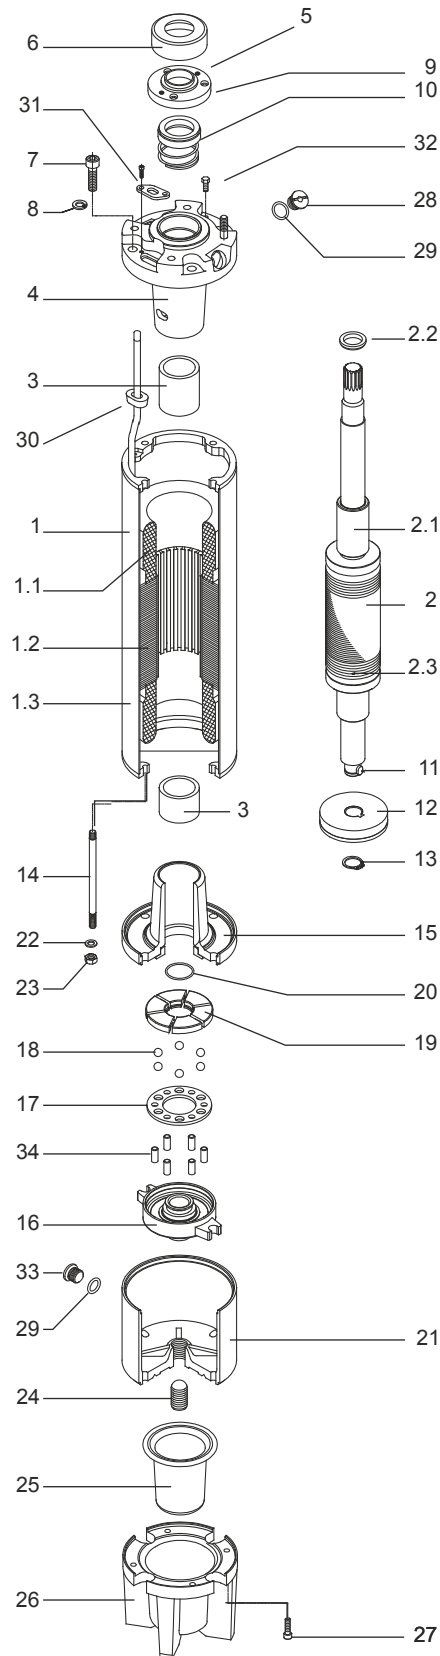


Type	Dimension	kW	HP	D.O.L.		Wye-Delta		Ax. Thrust	Start	Length	Weight
				mm ²	n	mm ²	n	kN	start/h	mm	kg
FSM HT 6/5.5	6"	4	5.5	3x2,5	1	3x2,5	2	20	20	649	40
FSM HT 6/7.5	6"	5,5	7.5	3x2,5	1	3x2,5	2	20	20	649	40
FSM HT 6/10	6"	7,5	10	3x2,5	1	3x2,5	2	20	20	678	43,5
FSM HT 6/12.5	6"	9,3	12,5	3x2,5	1	3x2,5	2	20	20	758	50
FSM HT 6/15	6"	11	15	3x4	1	3x4	2	20	20	800	55
FSM HT 6/17.5	6"	13	17,5	3x4	1	3x4	2	20	20	851	60
FSM HT 6/20	6"	15	20	3x4	1	3x4	2	20	20	911	65
FSM HT 6/25	6"	18,5	25	3x6	1	3x4	2	20	20	973	72
FSM HT 6/30	6"	22	30	3x6	1	3x4	2	20	20	1.006	76
FSM HT 6/35	6"	26,5	35	3x10	1	3x6	2	26,5	15	1.106	87
FSM HT 6/40	6"	30	40	3x16	1	3x6	2	26,5	15	1.217	98
FSM HT 6/50	6"	37	50	3x16	1	3x6	2	26,5	15	1.247	103
FSM HT 6/60	6"	45	60	3x16	1	3x6	2	26,5	15	1.347	110
FSM HT 7/30	7"	22	30	3x6	1	3x4	2	45	17	840	81
FSM HT 7/35	7"	26,5	35	3x10	1	3x6	2	45	17	890	86
FSM HT 7/40	7"	30	40	3x16	1	3x6	2	45	17	940	91
FSM HT 7/50	7"	37	50	3x16	1	3x6	2	45	17	980	103
FSM HT 7/60	7"	45	60	3x16	1	3x10	2	45	17	1.060	113
FSM HT 7/70	7"	52	70	3x16	1	3x10	2	45	17	1.139	127
FSM HT 7/75	7"	55	75	3x16	1	3x10	2	45	17	1.218	138
FSM HT 7/80	7"	60	80	3x16	1	3x10	2	45	17	1.250	149
FSM HT 7/90	7"	67	90	3x16	1	3x10	2	45	17	1.282	160
FSM HT 8/40	8"	30	40	3x16	1	3x10	2	45	15	996	120
FSM HT 8/50	8"	37	50	3x16	1	3x10	2	45	15	1.056	129
FSM HT 8/60	8"	45	60	3x16	1	3x10	2	45	15	1.116	138
FSM HT 8/70	8"	52	70	3x16	1	3x10	2	45	15	1.201	152
FSM HT 8/75	8"	55	75	3x16	1	3x10	2	45	15	1.286	170
FSM HT 8/80	8"	60	80	3x16	1	3x10	2	45	15	1.286	170
FSM HT 8/90	8"	67	90	3x16	1	3x10	2	45	15	1.341	185
FSM HT 8/100	8"	75	100	3x25	1	3x16	2	45	15	1.366	186
FSM HT 8/110	8"	81	110	3x25	1	3x16	2	55	15	1.391	195
FSM HT 8/125	8"	92	125	3x25	1	3x16	2	55	10	1.471	210
FSM HT 8/135	8"	100	135	3x25	1	3x16	2	55	10	1.536	225
FSM HT 8/150	8"	110	150	3x25	1	3x16	2	55	10	1.601	235
FSM HT 10/100	10"	75	100	3x25	1	3x16	2	55	10	1.250	200
FSM HT 10/110	10"	81	110	3x25	1	3x16	2	75	10	1.310	228
FSM HT 10/125	10"	92	125	3x25	1	3x16	2	75	10	1.370	256
FSM HT 10/150	10"	110	150	3x35	1	3x25	2	75	10	1.430	284
FSM HT 10/175	10"	129	175	3x35	2	3x25	2	75	10	1.510	311
FSM HT 10/200	10"	147	200	3x35	2	3x25	2	75	10	1.610	338
FSM HT 10/225	10"	166	225	3x35	2	3x25	2	75	10	1.740	370
FSM HT 10/250	10"	185	250	-	-	3x35	2	75	10	1.820	400
FSM HT 10/300	10"	220	300	-	-	3x35	2	75	10	1.820	405


Motors Dimensions

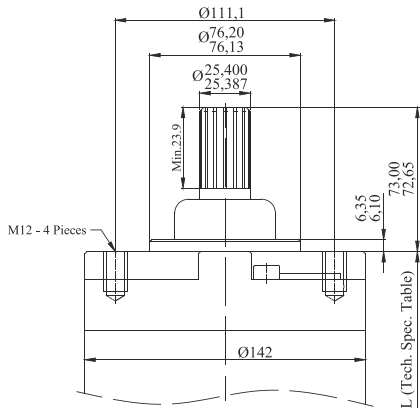


6" Motor

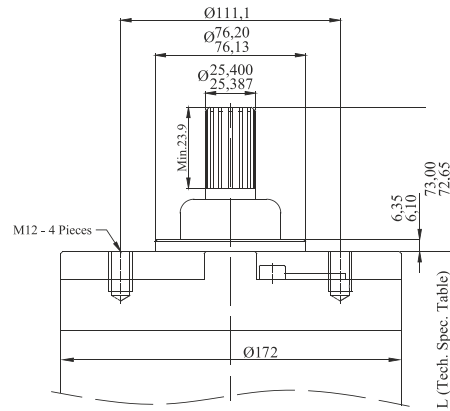

7" Motor

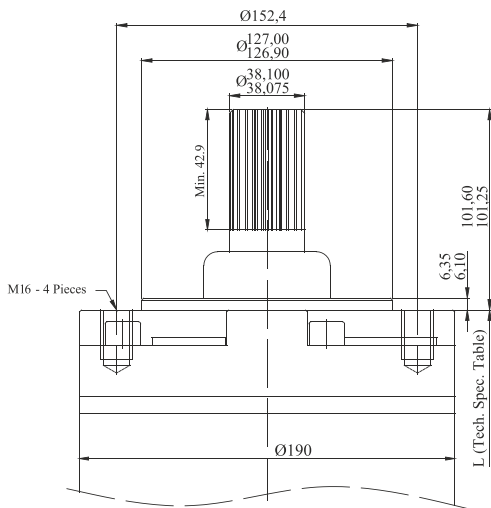

8" Motor

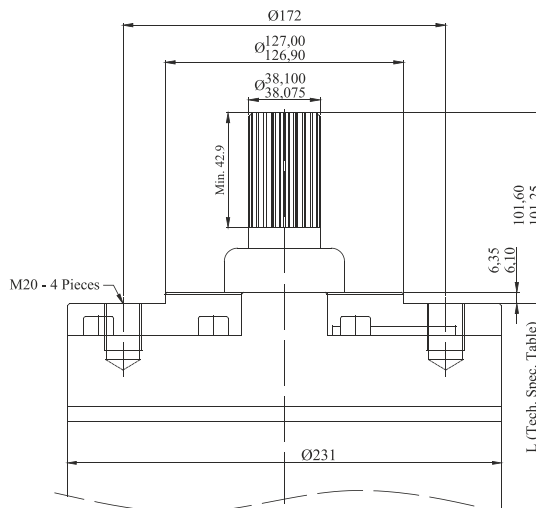


10" Motor



Cable Dimensions

Cable Type	Thickness	Width	Diameter
mm ²	(t) mm	(w) mm	(d) mm
3x2,5	6,4	15	3,6
3x4	7,1	16,5	4,1
3x6	8	18,3	4,6
3x10	8,8	21,8	6
3x16	10,5	25,4	7
3x25	12	33	9
3x35	13,5	34,5	10,1

Cable Type	Thickness	Width	Diameter
mm ²	(t) mm	(w) mm	(d) mm
4x2,5	18	18	3,6
4x4	20,2	20,2	4,1
4x6	22,4	22,4	4,6
4x10	28	28	6
4x16	33,7	33,7	7
4x25	40,1	40,1	9

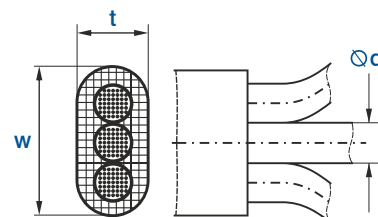

6" Submersible Motors

50 Hz

Type	R _N		Axial Load	Voltage	n _N	I _N	I _A	Efficiency (% load)			Cos φ (% load)		
	HP	kW						kN	V	rpm	A	A	50
FSM HT 6/5.5	5,5	4	20	380	2770	10,2	39,4	67	71	71	63	71	84
				400	2785	9,8	37,8	68	72	72	59	67	82
				415	2795	9,5	36,9	68	72	72	57,5	66	81
FSM HT 6/7.5	7,5	5,5	20	380	2780	13,3	52,7	70	73	75	63	71	84
				400	2795	12,8	50,6	71	74	76	59	67	82
				415	2805	12,3	48,7	72	75	77	57,5	66	81
FSM HT 6/10	10	7,5	20	380	2790	17,2	66,4	77	79	79	63	71	84
				400	2805	16,5	63,8	79	80	80	59	67	82
				415	2815	16,1	62,2	79	80	80	57,5	66	81
FSM HT 6/12.5	12,5	9,3	20	380	2850	20,8	80,3	80	81	81	63	71	84
				400	2855	20,2	78,1	80	81	81	59	67	82
				415	2865	19,5	75,3	81	82	82	57,5	66	81
FSM HT 6/15	15	11	20	380	2810	23,7	91,6	81	82	82	67	75	86
				400	2825	22,8	88,0	82	83	83	63	71	84
				415	2835	22,2	85,9	82	83	83	61	69	83
FSM HT 6/17.5	17,5	13	20	380	2820	28,7	110,9	80	81	81	65	73	85
				400	2835	27,6	106,6	81	82	82	61	69	83
				415	2845	26,6	102,7	82	83	83	59	67	82
FSM HT 6/20	20	15	20	380	2850	33,1	127,9	80	81	81	65	73	85
				400	2855	32,2	124,5	80	81	81	61	69	83
				415	2865	31,0	120,0	81	82	82	59	67	82
FSM HT 6/25	25	18,5	20	380	2850	41,8	161,6	80	81	81	61	69	83
				400	2865	40,2	155,4	81	82	82	57,5	66	81
				415	2875	38,8	149,8	82	83	83	56,5	65	80
FSM HT 6/30	30	22	20	380	2860	48,5	187,6	81	82	82	63	71	84
				400	2875	46,7	180,3	82	83	83	59	67	82
				415	2885	45,0	173,9	83	84	84	57,5	66	81
FSM HT 6/35	35	26,5	26,5	380	2870	56,4	217,9	83	84	84	65	73	85
				400	2885	54,9	212,0	83	84	84	61	69	83
				415	2895	52,9	204,4	84	85	85	59	67	82
FSM HT 6/40	40	30	26,5	380	2880	64,6	249,7	82	83	83	65	73	85
				400	2895	62,1	240,0	83	84	84	61	69	83
				415	2905	59,9	231,4	84	85	85	59	67	82
FSM HT 6/50	50	37	26,5	380	2890	79,7	315,6	80	81	83	65	73	85
				400	2905	76,7	303,3	81	82	84	61	69	83
				415	2915	74,7	288,8	83	84	84	59	67	82
FSM HT 6/60	60	45	26,5	380	2890	96,9	374,7	82	81	83	65	73	85
				400	2905	93,2	360,2	81	82	84	61	69	83
				415	2915	87,7	339,0	83	84	84	59	67	85

FSM HT 6"

Motors Specifications

Motor Power Range **5,5 HP - 60 HP**

Axial Thrust Load Capacity **5,5 HP - 30 HP = 20,0 kN**
35,0 HP - 60 HP = 26,5 kN

Outside Diameter **142 mm**

Flange Standard **6" NEMA Standard**

Due to continuous improvement in design we reserve the right to amend specifications or data without prior notice.

50 Hz

7" Submersible Motors

Type	P _N		Axial Load kN	Voltage V	n _N rpm	I _N A	I _A A	Efficiency (% load)			Cos Φ (% load)		
	HP	kW						50	75	100	50	75	100
FSM HT 7/30	30	22	45	380	2880	46,3	235	83	84	84	76	82	86
				400	2900	44,5	225	82	84	85	75	81	85
				415	2910	43,4	219	81	84	85	70	77	83
FSM HT 7/35	35	26,5	45	380	2880	55,1	279	84	85	85	76	82	86
				400	2900	52,9	269	83	85	85	75	81	85
				415	2910	51,6	262	82	85	86	70	77	83
FSM HT 7/40	40	30	45	380	2880	62,4	312	85	86	85	66	82	86
				400	2900	59,2	300	84	86	86	75	81	85
				415	2910	57,8	294	83	86	87	70	77	83
FSM HT 7/50	50	37	45	380	2880	74,3	377	85	86	86	78	85	88
				400	2900	72,2	366	84	86	86	75	82	86
				415	2910	70,4	358	83	86	87	71	80	84
FSM HT 7/60	60	45	45	380	2870	90,3	459	85	86	86	76	84	88
				400	2890	87,8	446	84	86	86	75	83	86
				415	2900	85,7	435	83	86	87	74	80	84
FSM HT 7/70	70	52	45	380	2860	105,6	537	85	86	86	78	83	87
				400	2880	102,7	522	85	86	86	76	82	85
				415	2890	100,2	509	84	86	87	73	79	83
FSM HT 7/75	75	55	45	380	2900	112,9	554	85	85	84	76	84	88
				400	2905	109,8	540	84	85	84	75	83	86
				415	2910	107,1	518	83	85	85	74	80	84
FSM HT 7/80	80	60	45	380	2900	123,3	596	85	85	84	76	84	88
				400	2905	119,9	580	84	85	84	75	83	86
				415	2905	116,9	565	83	85	85	74	80	84
FSM HT 7/90	90	67	45	380	2895	137,7	666	85	85	84	76	84	88
				400	2900	133,9	647	84	85	84	75	83	86
				415	2905	130,5	631	83	85	85	74	80	84

www.dynapumps.com.au



Dynapumps Offices Australia & Chile

Motors Specifications

(FSM HT 8" SLIM LINE) FSM HT 7"

Motor Power Range **30 HP - 90 HP**

Axial Thrust Load Capacity **45 kN**

Outside Diameter **172 mm**

Flange Standard **6" NEMA Standard**

Due to continuous improvement in design we reserve the right to amend specifications or data without prior notice.

8" Submersible Motors

50 Hz

Type	R _N		Axial Load kN	Voltage V	n _N rpm	I _N A	I _A A	Efficiency (% load)			Cos φ (% load)		
	HP	kW						50	75	100	50	75	100
FSM HT 8/40	40	30	45	380	2850	61,7	239	82	83	83	75	80	89
				400	2865	59,3	229	83	84	84	69	76	87
				415	2875	57,8	223	83	84	84	67	75	86
FSM HT 8/50	50	37	45	380	2860	74,3	287	84	85	85	75	80	89
				400	2875	71,4	276	85	86	86	69	76	87
				415	2885	69,6	269	85	86	86	67	75	86
FSM HT 8/60	60	45	45	380	2860	90,4	349	84	85	85	75	80	89
				400	2875	86,8	336	85	86	86	69	76	87
				415	2885	84,6	327	85	86	86	67	75	86
FSM HT 8/70	70	52	45	380	2850	103,3	399	84	85	85	77	83	90
				400	2865	99,2	383	85	86	86	72	78	88
				415	2875	96,7	374	85	86	86	69	76	87
FSM HT 8/75	75	55	45	380	2850	110,5	427	83	84	84	77	83	90
				400	2865	107,4	415	83	84	84	72	78	88
				415	2875	103,5	400	84	85	85	69	76	87
FSM HT 8/80	80	60	45	380	2850	119,1	460	85	86	86	75	80	89
				400	2865	115,7	447	85	86	86	69	76	87
				415	2875	112,9	436	85	86	86	67	75	86
FSM HT 8/90	90	67	45	380	2850	134,6	520	84	85	85	75	80	89
				400	2865	129,3	499	85	86	86	69	76	87
				415	2875	126,0	487	85	86	86	67	75	86
FSM HT 8/100	100	75	45	380	2850	150,7	582	83	84	84	77	83	90
				400	2865	144,7	559	84	85	85	72	78	88
				415	2875	141,1	545	84	85	85	69	76	87
FSM HT 8/110	110	81	55	380	2855	162,7	629	84	85	85	75	80	89
				400	2860	156,3	604	85	86	86	69	76	87
				415	2865	152,4	589	85	86	86	67	75	86
FSM HT 8/125	125	92	55	380	2820	184,8	714	84	85	85	75	80	89
				400	2835	177,5	686	85	86	86	69	76	87
				415	2850	173,1	669	85	86	86	67	75	86
FSM HT 8/135	135	100	55	380	2920	200,8	776	84	85	85	75	80	89
				400	2925	192,9	746	85	86	86	69	76	87
				415	2935	188,1	727	85	86	86	67	75	86
FSM HT 8/150	150	110	55	380	2900	218,5	844	84	85	85	74	80	90
				400	2910	207,4	802	85	86	86	69	76	89
				415	2915	199,9	773	85	86	86	67	75	89

FSM HT 8"

Motors Specifications

Motor Power Range

40 HP - 150 HP

Axial Thrust Load Capacity

**40 HP - 100 HP = 45 kN
110 HP - 150 HP = 55 kN**

Outside Diameter

192 mm

Flange Standard

8" NEMA Standard

Due to continuous improvement in design we reserve the right to amend specifications or data without prior notice.

50 Hz

10" Submersible Motors

Type	R _n		Axial Load kN	Voltage V	n _N rpm	I _N A	I _A A	Efficiency (% load)			Cos Φ (% load)		
	HP	kW						50	75	100	50	75	100
FSM HT 10/110	110	81	75	380	2880	159	615	84	85	85	78,5	84	91
				400	2895	153	590	85	86	86	74,5	80	89
				415	2905	147	569	86	87	87	71,5	78	88
FSM HT 10/125	125	92	75	380	2890	179	690	85	86	86	78,5	84	91
				400	2905	174	671	85	86	86	74,5	80	89
				415	2915	169	654	85	86	86	71,5	78	88
FSM HT 10/150	150	110	75	380	2890	216	835	85	86	86	77,0	83	90
				400	2905	210	811	85	86	86	71,5	78	88
				415	2915	205	791	85	86	86	68,5	76	87
FSM HT 10/175	175	129	75	380	2910	248	957	86	87	87	78,5	84	91
				400	2925	238	919	87	88	88	74,5	80	89
				415	2935	232	896	87	88	88	71,5	78	88
FSM HT 10/200	200	147	75	380	2900	282	1090	86	87	87	78,5	84	91
				400	2915	274	1059	86	87	87	74,5	80	89
				415	2925	264	1020	87	88	88	71,5	78	88
FSM HT 10/225	225	166	75	380	2890	322	1245	85	86	86	78,5	84	91
				400	2905	309	1196	86	87	87	74,5	80	89
				415	2915	302	1165	86	87	87	71,5	78	88
FSM HT 10/250	250	185	75	380	2895	359	1388	85	86	86	78,5	84	91
				400	2905	349	1348	85	86	86	74,5	80	89
				415	2915	336	1299	86	87	87	71,5	78	88
FSM HT 10/300	300	220	75	380	2895	427	1.651	85	86	86	79	84	91
				400	2905	415	1.604	85	86	86	75	80	89
				415	2915	400	1.546	86	87	87	72	78	88

www.dynapumps.com.au



Dynapumps Offices Australia & Chile

Motors Specifications

FSM HT 10"

Motor Power Range **110 HP - 250 HP**

Axial Thrust Load Capacity **75 kN**

Outside Diameter **231 mm**

Flange Standard **8" NEMA Standard**

Due to continuous improvement in design we reserve the right to amend specifications or data without prior notice.

6" Submersible Motors

60 Hz

Type	R _N		Axial Load	Voltage	n _N	I _N	I _A	Efficiency (% load)			Cos φ (% load)		
	HP	kW						kN	V	rpm	A	A	50
FSM HT 6/5.5	5,5	4	20	460	3350	8,4	44	69	70	70	65	74	85
FSM HT 6/7.5	7,5	5,5	20	460	3360	11,3	59	71	72	72	65	74	85
FSM HT 6/10	10	7,5	20	460	3380	14,2	73	77	78	78	65	74	85
FSM HT 6/12.5	12,5	9,3	20	460	3390	17,4	90	78	79	79	65	74	85
FSM HT 6/15	15	11	20	460	3400	19,6	101	80	81	81	67	76	87
FSM HT 6/17.5	17,5	13	20	460	3410	23,4	121	80	81	81	66	75	86
FSM HT 6/20	20	15	20	460	3440	27,3	141	79	80	80	66	75	86
FSM HT 6/25	25	18,5	20	460	3450	34,5	178	79	80	80	64	73	84
FSM HT 6/30	30	22	20	460	3460	40,1	207	80	81	81	65	74	85
FSM HT 6/35	35	26,5	26,5	460	3470	47,1	242	81	82	82	66	75	86
FSM HT 6/40	40	30	26,5	460	3480	53,4	272	81	82	82	66	75	86
FSM HT 6/50	50	37	26,5	460	3490	66,6	341	80	81	81	66	75	86
FSM HT 6/60	60	45	26,5	460	3490	82,1	415	80	81	80	66	75	86

7" Submersible Motors

60 Hz

Type	R _N		Axial Load	Voltage	n _N	I _N	I _A	Efficiency (% load)			Cos φ (% load)		
	HP	kW						kN	V	rpm	A	A	50
FSM HT 7/30	30	22	45	460	3480	38,2	194	82	83	83	77	83	87
FSM HT 7/35	35	26,5	45	460	3480	45,0	230	83	84	84	77	83	87
FSM HT 7/40	40	30	45	460	3480	52,1	260	84	85	84	77	83	87
FSM HT 7/50	50	37	45	460	3480	61,4	311	84	85	85	79	86	89
FSM HT 7/60	60	45	45	460	3470	74,7	379	84	85	85	77	85	89
FSM HT 7/70	70	52	45	460	3480	87,2	443	84	85	85	79	84	88
FSM HT 7/80	80	60	45	460	3460	100,7	473	84	85	85	79	84	88
FSM HT 7/90	90	67	45	460	3460	112,4	528	84	85	85	79	84	88

Motors Specifications

FSM HT 6"

FSM HT 7"

(FSM HT 8" SLIM LINE)

Motor Power Range

5,5 HP - 60 HP

30 HP - 90 HP

Axial Thrust Load Capacity

5,5 HP - 30 HP = 20,0 kN
35,0 HP - 60 HP = 26,5 kN

45 kN

Outside Diameter

142 mm

172 mm

Flange Standard

6" NEMA Standard

6" NEMA Standard

Due to continuous improvement in design we reserve the right to amend specifications or data without prior notice.

60 Hz

8" Submersible Motors

Type	R _N		Axial Load	Voltage	n _N	I _N	I _A	Efficiency (% load)			Cos φ (% load)		
	HP	kW						kN	V	rpm	A	A	50
FSM HT 8/40	40	30	45	460	3450	51,0	258	83	83	82	82	86	90
FSM HT 8/50	50	37	45	460	3460	61,4	308	85	85	84	82	86	90
FSM HT 8/60	60	45	45	460	3460	74,8	382	85	85	84	82	86	90
FSM HT 8/70	70	52	45	460	3450	85,3	431	85	85	84	83	87	91
FSM HT 8/75	75	55	45	460	3450	90,2	458	85	85	84	83	87	91
FSM HT 8/80	80	60	45	460	3450	99,6	509	85	85	84	82	86	90
FSM HT 8/90	90	67	45	460	3450	111,2	563	85	85	84	82	86	90
FSM HT 8/100	100	75	45	460	3450	123,1	625	85	85	84	82	86	91
FSM HT 8/110	110	81	55	460	3430	134,4	681	85	85	84	82	86	90
FSM HT 8/125	125	92	55	460	3430	152,8	770	85	85	84	82	86	90
FSM HT 8/135	135	100	55	460	3430	166,0	837	85	85	84	82	86	90
FSM HT 8/150	150	110	55	460	3430	182,6	920	85	85	84	82	86	90



60 Hz

10" Submersible Motors

Type	R _N		Axial Load	Voltage	n _N	I _N	I _A	Efficiency (% load)			Cos φ (% load)		
	HP	kW						kN	V	rpm	A	A	50
FSM HT 10/110	110	81	75	460	3490	131,5	663	84	84	84	87	90	92
FSM HT 10/125	125	92	75	460	3500	149,4	748	84	84	84	87	90	92
FSM HT 10/150	150	110	75	460	3500	180,5	910	84	85	84	86	89	91
FSM HT 10/175	175	129	75	460	3510	207,0	1.050	85	86	85	87	90	92
FSM HT 10/200	200	147	75	460	3500	236,0	1.197	85	85	85	87	90	92
FSM HT 10/225	225	166	75	460	3490	266,2	1.347	85	85	85	87	90	92
FSM HT 10/250	250	185	75	460	3490	297,0	1.502	85	85	85	87	90	92
FSM HT 10/300	300	220	75	460	3490	353,1	1.786	85	85	85	87	90	92


FSM HT 8" FSM HT 10"

Motors Specifications

Motor Power Range	40 HP - 155 HP	110 HP - 300 HP
Axial Thrust Load Capacity	40 HP - 100 HP = 45 kN 110 HP - 150 HP = 55 kN	75 kN
Outside Diameter	192 mm	231 mm
Flange Standard	8" NEMA Standard	8" NEMA Standard

Due to continuous improvement in design we reserve the right to amend specifications or data without prior notice.

Other Features

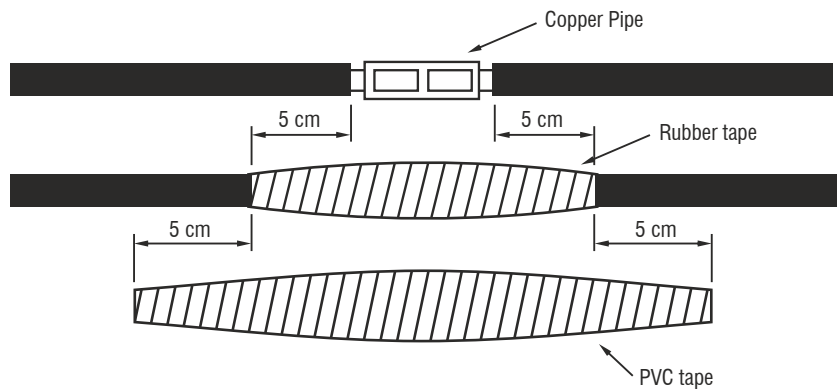

Power Cable Connection


Connection of the power cable that will be used along the well and until the control panel with the power cable on the motor must be done very carefully and by the professionals only. Unless the insulation after the connection is well done, short circuit might happen when the connection area is in the water.

Insulation of each cable should be stripped only as far as necessary to provide room for a stake type connector. Each individual joint should be taped with pvc tape, using two layers by wrapping tightly for eliminating airspaces as much as possible.

Total thickness of tape should be no less than the thickness of the cable insulation in order to prevent the smashing of the cables when the pump is lowered in the well.

Motor Water Filling

During the storage and delivery period, antifreeze is used not to cause any freezing. Dynapumps submersible motors are filled with water+ antifreeze mix before shipment to protect motor till -10°C freezing temperature.

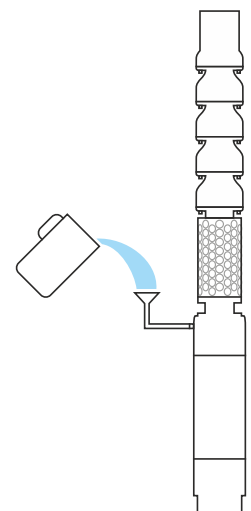

Before the installation of the motor to the well, water level inside the motor should be checked. Position the motor horizontally and remove the screw 1 and 2, fill the motor with clean water if it is not full. After waiting 30 minutes with the filling screw open, fill the water completely again and tight the screw providing no leakage.


Use Cooling Jacket

Cooling of submersible motors is provided with the flow of the water around it. That's allows water flow around motors has vital importance during submersible pump installation.



This flow rate depends on diameter and power of motor.

Most important factor of submersible motors' long service life is that the motor has to be cooled well. Required flow velocity around the motor is given in the table below for motors being cooled well enough.

If the motor will be installed in an open body of water (i.e pool) or diameter of the well is much bigger than the diameter of the motor, Flow Inducer Sleeve must be used to provide the flow velocities that are given in the table below, around the motor.

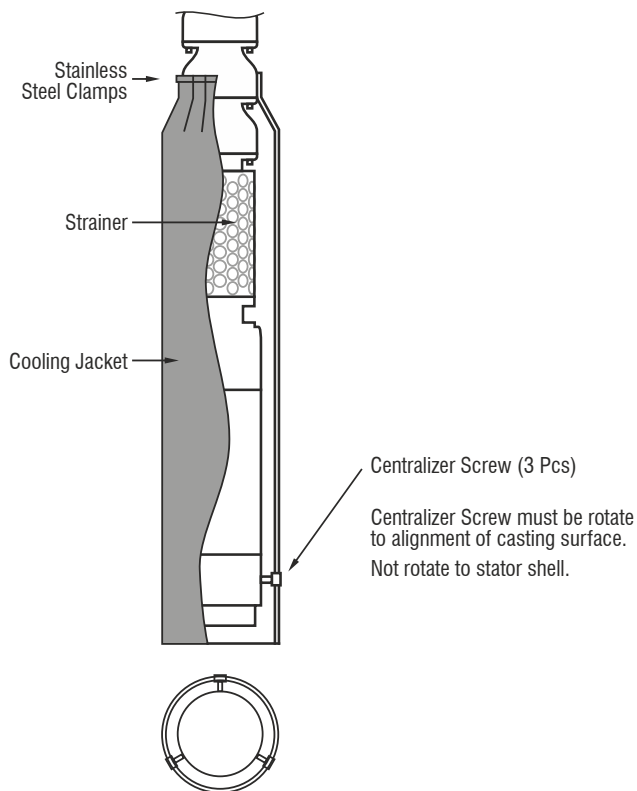

Motor Type	Motor Rating	Min. Water Flow(m/s)
6"	5.5 - 18.5 kW	0.2
	22 - 37 kW	0.5
7"	22 - 55 kW	0.2
8"	30 - 55 kW	0.2
	60 - 92 kW	0.5
10"	81 - 110 kW	0.5

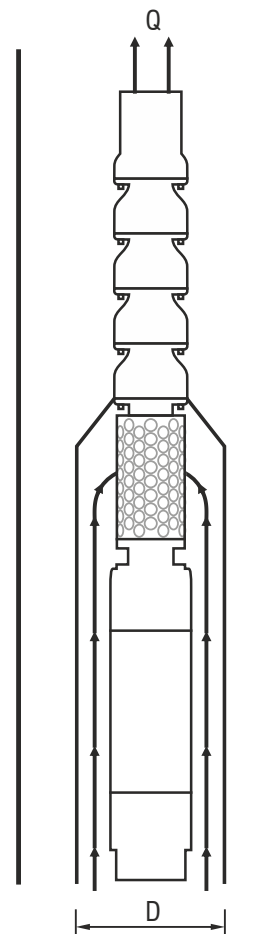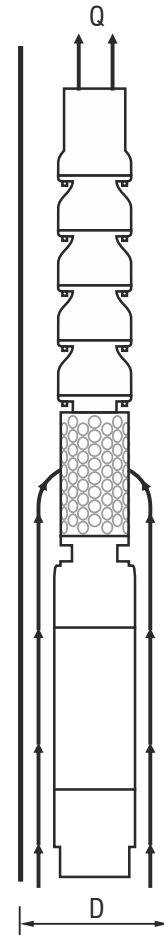

Other Features

Insulation Resistance Test

All Dynapumps motors are applied insulation test under 3.000 V before shipment. Motors which have at least 2.000 megaohm test result are shipped. Insulation test results should be controlled before the installation and after connecting power cables as it is explained below. Meger tester's one probe should be touched to motor body and other probe should be touched to tip of each power cable to measure the insulation of each phase.

If there is any short circuit in a phase, insulation value is 0 megaohm.

Under the normal operating conditions, a motor inside the well should have 2 megaohm insulation resistance. When the insulation resistance drops under 0.5 megaohm, there might be a insulation problem in winding.

Test voltage should be at least 500 V DC.

After extending power cables with a joint, same test procedures should be also applied for insulation control while power cables are inside water. If insulation test result for any winding is lower than 100 megaohm, cable joint should be done again.



Use Frequency Converter and Soft Starter

These points listed below should be taken into consideration while operating submersible motors with frequency converter and soft starter.

- ▶ Needed precautions should have been taken to protect your frequency converter from voltage fluctuations.
- ▶ Flow rate around motor must be at least 0,15 m/s. If flow rate is not enough, flow inducer sleeve must be used to provide the needed flow rate.
- ▶ In systems which are operated by frequency converter and soft starter, motor selection should be done as choosing next higher motor rate for pumps will provide long service life for motors.
- ▶ Motors should be operated between 30-50 Hz with frequency converters. As the protective water layer can't be formed on thrust bearing at the lower frequencies, motor would get damaged.
- ▶ Dual slope frequency converters should be used while using soft starter too.



Voltage Drop and Cable Power Loss

To determine the cable section it should be considered that the voltage drop must not exceed 3%. The formulas used for voltage drop calculation are given below.

Direct starter

1 cable	▶	$U_v = \frac{3,1 \times L \times I \times \cos\phi}{q \times U}$	$q = \frac{3,1 \times L \times I \times \cos\phi}{U_v \% \times U}$
2 cables in parallel	▶	$U_v = \frac{1,55 \times L \times I \times \cos\phi}{q \times U}$	$q = \frac{1,55 \times L \times I \times \cos\phi}{U_v \% \times U}$

Star-delta starter

$U_v = \frac{2,1 \times L \times I \times \cos\phi}{q \times U}$	$q = \frac{2,1 \times L \times I \times \cos\phi}{U_v \% \times U}$
--	---


The power loss along the feeling cable has to be calculated adjacent to

▶ $P_v = \frac{U_v}{\cos^2\phi}$


L : Cable length (m)
 I : Current at nominal voltage (A)
 q : Conductor section (mm²)
 cosφ : Power factor
 P_v : Power loss (%)
 U_v : Voltage drop (%)
 U : Nominal voltage (V)

Other Features

Energy Connection Schema

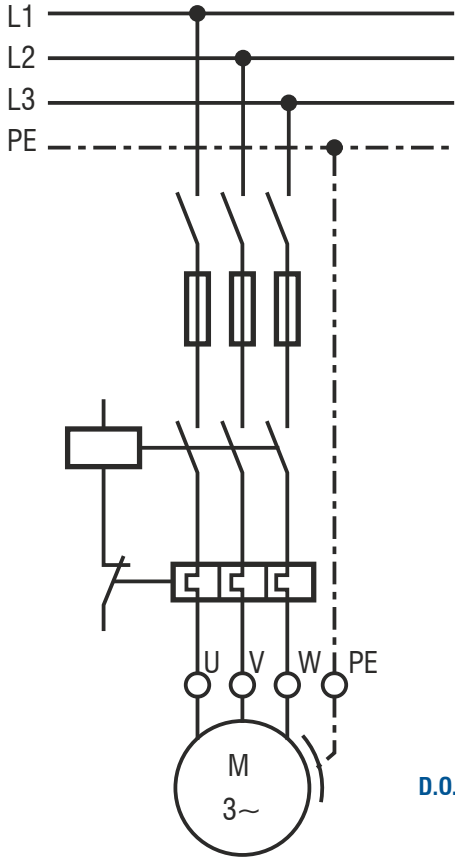

D.O.L Connection

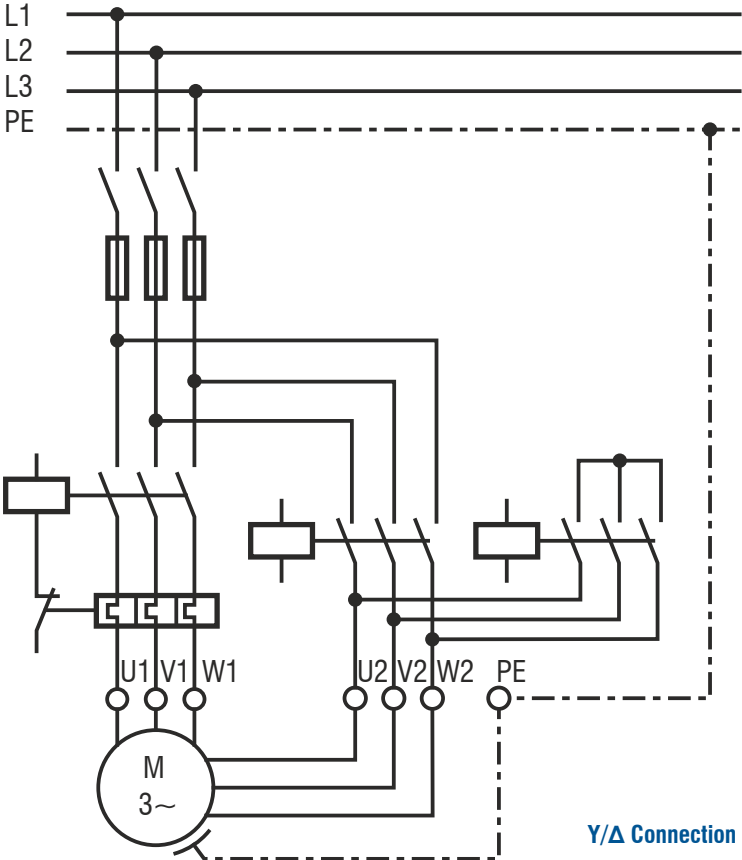

Y/Δ Connection

Trouble Shooting

Motor Does Not Start

Possible Cause	Remedy
No power or incorrect voltage	Check voltage at lines. Contact power company if voltage is incorrect
Fuses blown or circuit breakers tripped	Replace with proper fuse or reset circuit breakers
Control box malfunction	Repair or replace
Defective wiring	Correct faulty wiring or connections
Bound pump	Pull pump and correct problem. Run new installation until the water cleans
Defective cable or motor	Repair or replace

Motor Starts Too Often

Possible Cause	Remedy
Check valve stuck open	Replace if defective
Waterlogged tank	Repair or replace
Lenk in system	Replace damaged pipes or repair leaks

Motor Runs Continuously

Possible Cause	Remedy
Low water level in well	Throttle pump outlet or reset pump to lower level. Do not lower if sand may clog pump
Worn pump	Pull pump and replace worn parts
Loose coupling or broken motor shaft	Replace worn or damaged parts
Pump screen blocked	Clean screen and rest pump depth
Check valve stuck closed	Replace if defective
Control box malfunction	Repair or replace

Motor Runs But Overload Protector Trips

Possible Cause	Remedy
Incorrect voltage	Contact power company if voltage is incorrect
Overheated protectors	Shade box, provide ventilation or move box away from source
Defective control box	Repair or replace
Defective motor or cable	Repair or replace
Worn pump or motor	Replace pump and/or motor



(D.O.L.)

HP	Cable Sizes												
	3x1,5	3x2,5	3x4	3x6	3x10	3x16	3x25	3x35	3x50	3x70	3x95	3x95	
5,5	65	108	172	258	431	689							
7,5	48	80	129	193	322	515							
10	38	64	102	153	256	409	639						
12,5		52	83	125	209	334	522	730					
15		45	72	109	181	289	452	633					
17,5			61	92	153	245	383	536	765				
20			52	79	131	210	327	458	655				
25					106	170	266	372	531	744			
30					90	145	226	316	452	633			
35					76	122	190	266	380	532	722		
40					67	107	168	235	336	470	638		
50						89	139	195	279	390	529		
60							115	160	229	321	434	548	
70								139	198	278	377	476	
75								131	187	262	356	450	
80								120	172	241	326	411	
90									154	215	292	368	
100									132	192	261	329	
110									127	178	242	305	
125										157	213	269	
135										145	197	249	
150											182	230	
175											155	196	
200												171	
210													
225													
250													
300													

Wye - Delta

HP	Cable Sizes												
	3x1,5	3x2,5	3x4	3x6	3x10	3x16	3x25	3x35	3x50	3x70	3x95	3x95	
5,5	97	161	258	388	646								
7,5	72	121	193	290	483	773							
10	57	96	153	230	383	613	958						
12,5	47	78	125	188	313	501	783						
15	41	68	109	163	271	434	678	949					
17,5	34	57	92	138	230	367	574	803	982				
20	29	49	79	118	196	314	491	688	797				
25		40	64	96	159	255	398	558	678				
30			54	81	136	217	339	475	570	949			
35			46	68	114	182	285	399	503	798			
40				60	101	161	252	352	418	705			
50					84	134	209	293	344	585	794		
60					69	110	172	241	297	481	653		
70					59	95	149	208	281	416	565		
75						90	141	197	258	394	534	675	
80						82	129	180	231	361	490	619	
90						74	115	162	206	323	439	554	
100							103	144	191	289	392	495	
110								95	134	168	267	363	458
125									118	144	235	319	402
135									109	133	218	295	371
150										123	201	273	344
175											172	233	294
200											152	207	261
210											145	196	247
225											136	184	232
250												164	210
300												130	164

Dynapumps

MORE THAN JUST PUMPS

Santiago

Nueva Tajamar 481,
Torre Norte, WTC, Oficina 2004
Las Condes
Santiago - Chile

Concepción

Camino Los Carros 1955
Bodega 10, Módulo 2
Megacentro Los Carros
Concepción - Chile

Dynapumps Offices Australia & Chile
chile@dynapumps.com.au

www.dynapumps.com.au